

ER70-2100

EFORT

ER70-2100,
Maxium payload 70 kg with maxium reach 2146 mm.

Highlights

Thanks to the high stiffness structure, with high-speed intelligent palletizing application software, the takt is improved by 20%, bring customers more efficiency;
Multiple specific application software could be integrated, with soft PLC and a variety of field bus interface, which enable customers easily face various application challenges;
High performance collision detection function helps safety realization.

Applications

It can be used in grinding, polishing, handling operations, palletizing, etc.

Industries

Suitable for auto parts, photovoltaic, food and beverage, building materials, logistics and warehousing and other industries.




SPECIFICATIONS


Model	ER70-2100	
Type	Articulated	
Controlled axes	6 Axes	
Max. payload on wrist	70 kg	
Repeatability	±0.06 mm	
Robot weight	550 kg	
Reach	2146 mm	
Robot IP grade	IP54/IP67 (Wrist)	
Cabinet IP grade	IP54	
Drive mode	AC servo drive	
Installation	Floor	
Installation enviroment	Ambient temperature	0~45 °C
	Ambient humidity	RH≤80% (No dew nor frost allowed)
	Vibration acceleration	4.9 m/s ² (<0.5 G)

Allowable load moment at wrist	J4	182 N·m
	J5	182 N·m
	J6	120 N·m
Allowable load inertia at wrist	J4	12.68 kg·m ²
	J5	12.68 kg·m ²
	J6	10 kg·m ²
Maximum speed	J1	190°/sec
	J2	150°/sec
	J3	186°/sec
	J4	300°/sec
	J5	280°/sec
	J6	400°/sec
Motion range	J1	±180°
	J2	+70°-130°
	J3	+175°-80°
	J4	±360°
	J5	±115°
	J6	±450°


OPERATING SPACE

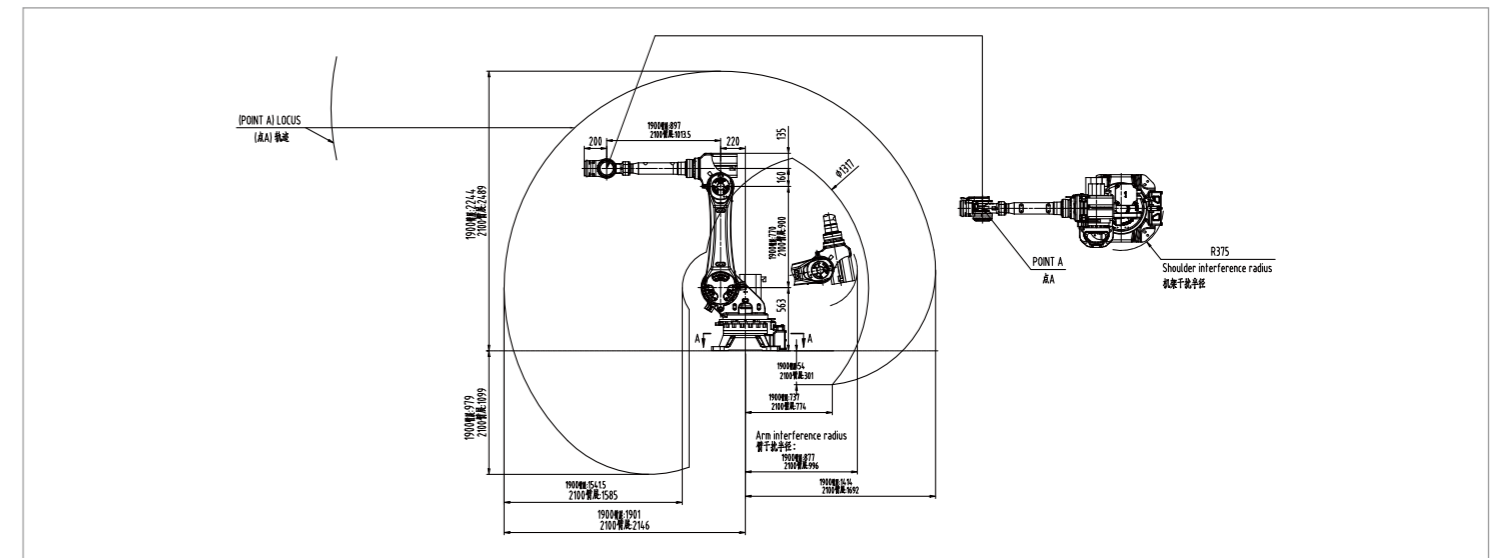

BASE MOUNTING SIZE

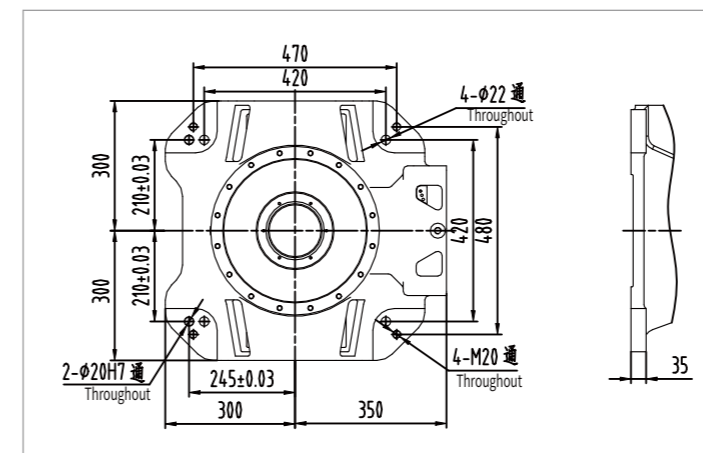

END FLANGE MOUNTING SIZE

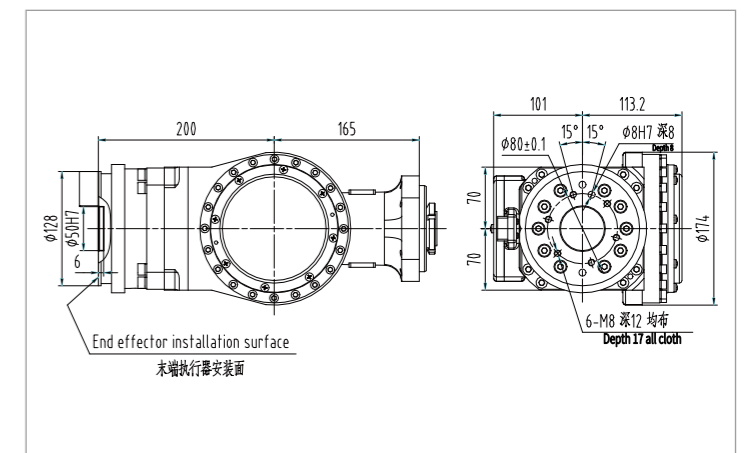

EFORT INTELLIGENT EQUIPMENT CO.,LTD.

PHONE: (00 86) 400-052-8877

ADDRESS: No.96 East Wanchun Road, China(Anhui) Pilot

Free Trade Zone Wuhu Area, Wuhu, Anhui Province, China

WWW.EFORT.COM.CN